




## Digital Displacement Decoder D-DD-2N-12

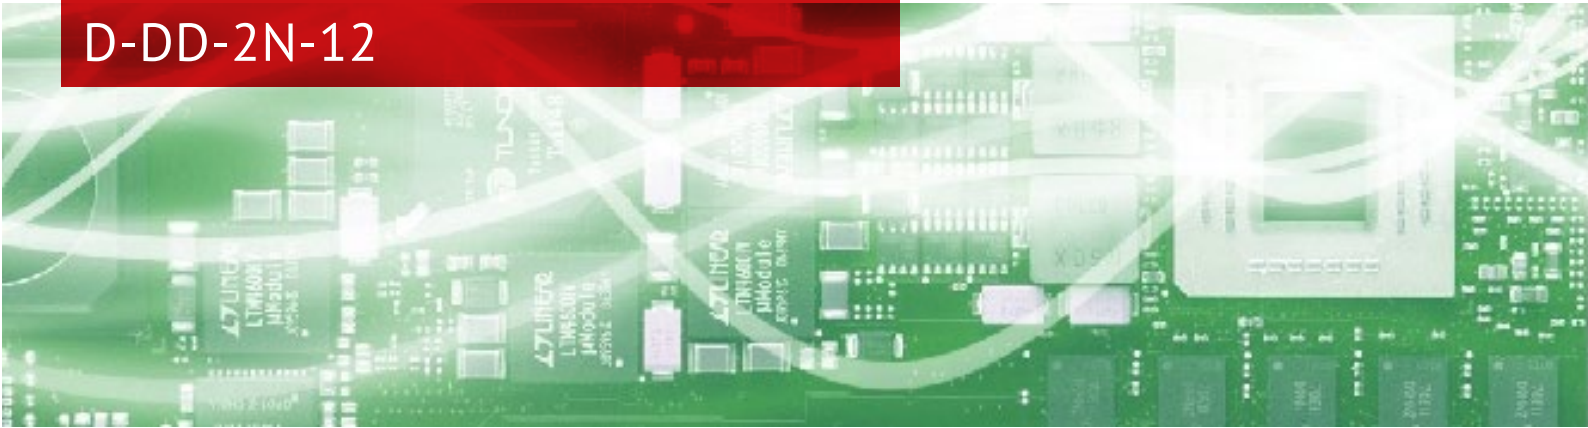

### Ultrafast FPGA-based Digital Signal Processing

Optomet Vibrometers feature an end-to-end FPGA-based digital signal processing allowing a fully digital read-out of the measurement data. Digital signal processing avoids any drawbacks of analog demodulation which may result from component aging, temperature dependencies, noise and non-linearities. Significantly higher sensitivity, better resolution, and stability are the benefits of OptoMET's end-to-end digital signal processing. Extremely low noise levels produce precise results even from poorly reflecting measurement objects.

-



#### HIGHLIGHTS:

- Digital decoder
- 19 displacement measuring ranges
- Frequency range: DC bis 1 MHz
- Max. velocity up to 12 m/s
- Resolution down to 50 femtometers

### High-Precision Sense Speed Displacement Decoder

All vibrometers series feature by default a velocity decoder and can be supplemented with a suitable displacement and/or acceleration decoder.

The D-DD-2N-12 displacement decoder is the perfect supplement to a D-VD-2N velocity decoder. Together they provide an excellent sensitivity, even under challenging measuring conditions. It can measure displacements up to a velocity of 12 m/s and a vibration frequency of 1 MHz.


Required velocity decoder: D-VD-2N-12

-

# Technical data

Pos.	Full Scale Output	Signal Frequency Range	Max. Velocity
	Peak to peak µm	kHz	m/s
1	0.245	0 ... 1000	12
2	0.49	0 ... 1000	12
3	0.98	0 ... 1000	12
4	2.45	0 ... 1000	12
5	4.9	0 ... 1000	12
6	9.8	0 ... 1000	12
7	24.5	0 ... 1000	12
8	49	0 ... 1000	12
9	98	0 ... 1000	12
10	245	0 ... 1000	12
11	490	0 ... 1000	12
12	980	0 ... 1000	12
13	2,450	0 ... 1000	12
14	4,900	0 ... 1000	12
15	9,800	0 ... 1000	12
16	24,500	0 ... 1000	12
17	49,000	0 ... 1000	12
18	98,000	0 ... 1000	12
19	245,000	0 ... 1000	12

## Range diagram

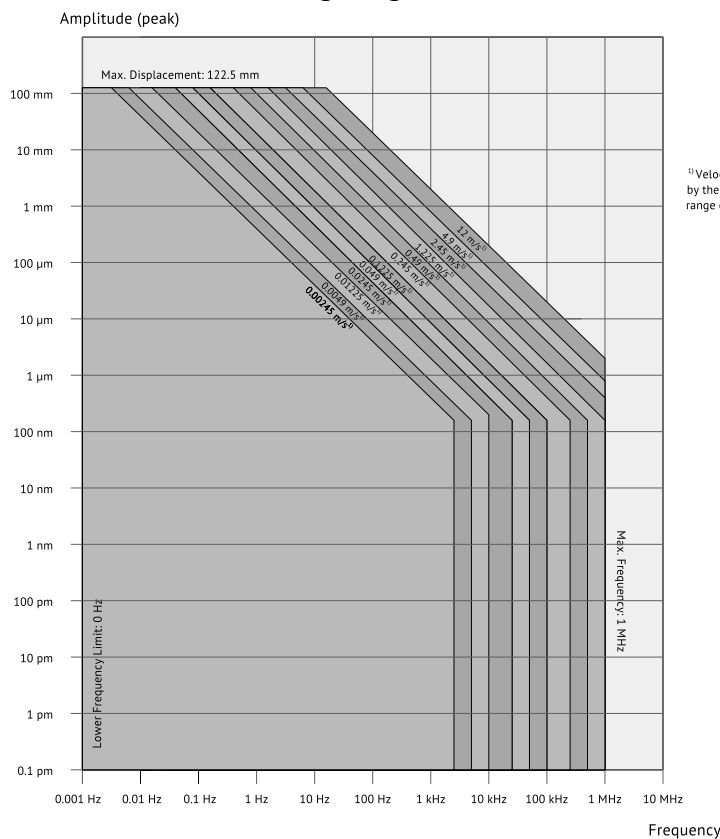

<sup>1)</sup>Velocity limit is determined by the selected measurement range of the velocity decoder.