




Digital Displacement Decoder D-DD-2N-R

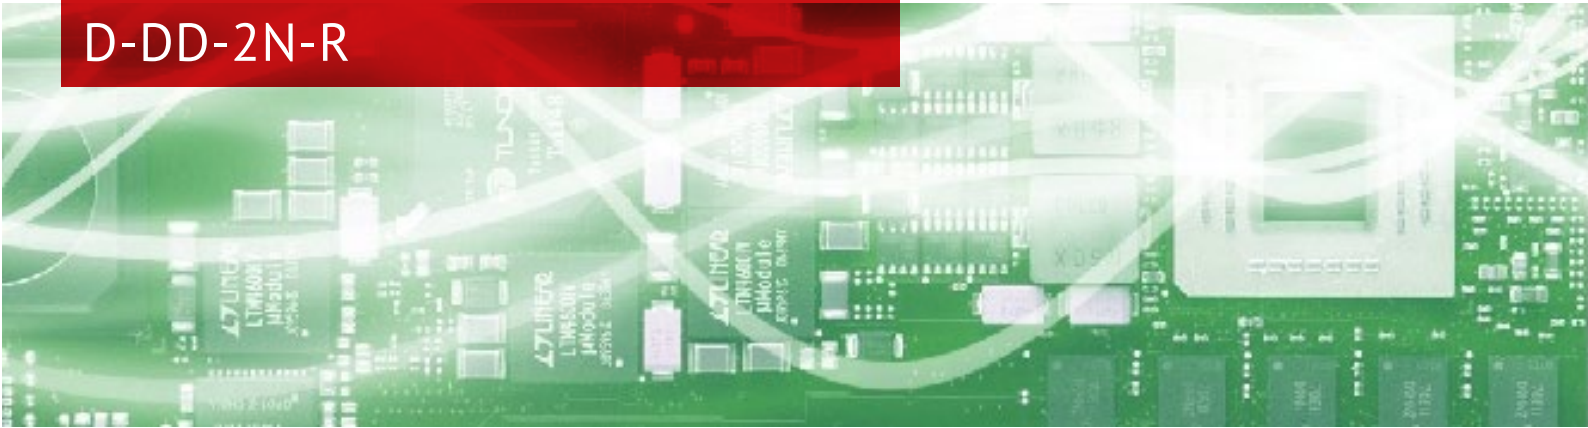

Ultrafast FPGA-based Digital Signal Processing

Optomet Vibrometers feature an end-to-end FPGA-based digital signal processing allowing a fully digital read-out of the measurement data. Digital signal processing avoids any drawbacks of analog demodulation which may result from component aging, temperature dependencies, noise and non-linearities. Significantly higher sensitivity, better resolution, and stability are the benefits of OptoMET's end-to-end digital signal processing. Extremely low noise levels produce precise results even from poorly reflecting measurement objects.



HIGHLIGHTS:

- Digital decoder
- 19 displacement measuring ranges
- Frequency range: DC bis 25 kHz
- Max. velocity up to 5 m/s
- Resolution down to 50 femtometers

Remote Sense Displacement Decoder


All vibrometers series feature by default a velocity decoder and can be supplemented with a suitable displacement and/or acceleration decoder.

The D-DD-2N-R special displacement decoder provide an excellent sensitivity, even under challenging measuring conditions. It can measure displacements up to > 1 m at a velocity of 5 m/s and a vibration frequency of up to 25 kHz. Required velocity decoder: D-VD-2N-R

Technical data

Pos.	Full Scale Output	Signal Frequency Range	Max. Velocity
	peak to peak μm	kHz	m/s
1	2.45	0 ... 25	5
2	4.9	0 ... 25	5
3	9.8	0 ... 25	5
4	24.5	0 ... 25	5
5	49	0 ... 25	5
6	98	0 ... 25	5
7	245	0 ... 25	5
8	490	0 ... 25	5
9	980	0 ... 25	5
10	2,450	0 ... 25	5
11	4,900	0 ... 25	5
12	9,800	0 ... 25	5
13	24,500	0 ... 25	5
14	49,000	0 ... 25	5
15	98,000	0 ... 25	5
16	245,000	0 ... 25	5
17	490,000	0 ... 25	5
18	980,000	0 ... 25	5
19	2,450,000	0 ... 25	5

Range diagram

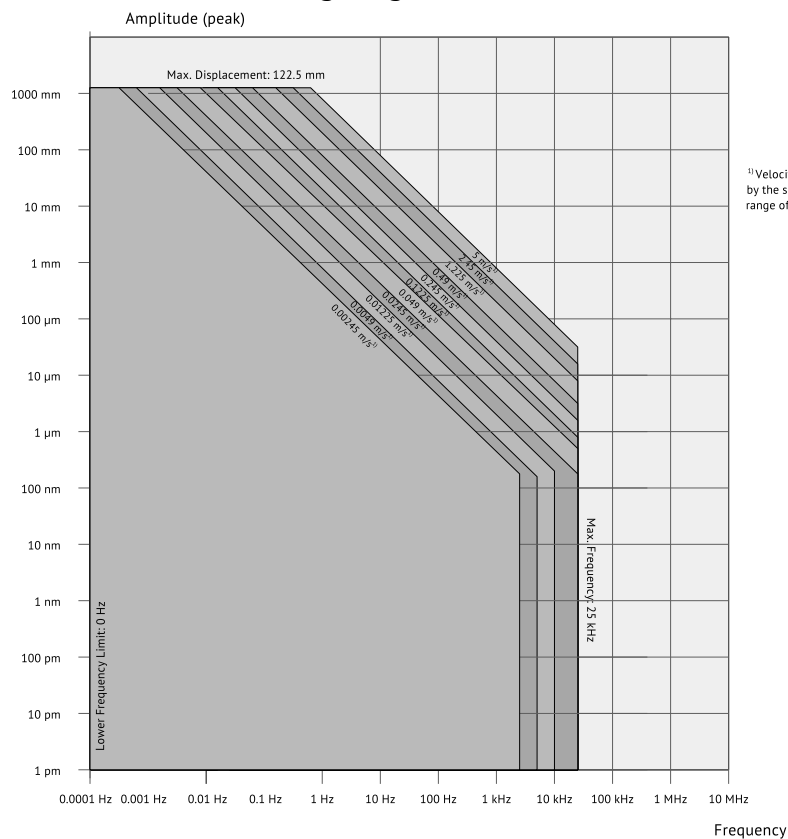

¹⁾Velocity limit is determined by the selected measurement range of the velocity decoder.