




Digital Displacement Decoder D-DD-2N

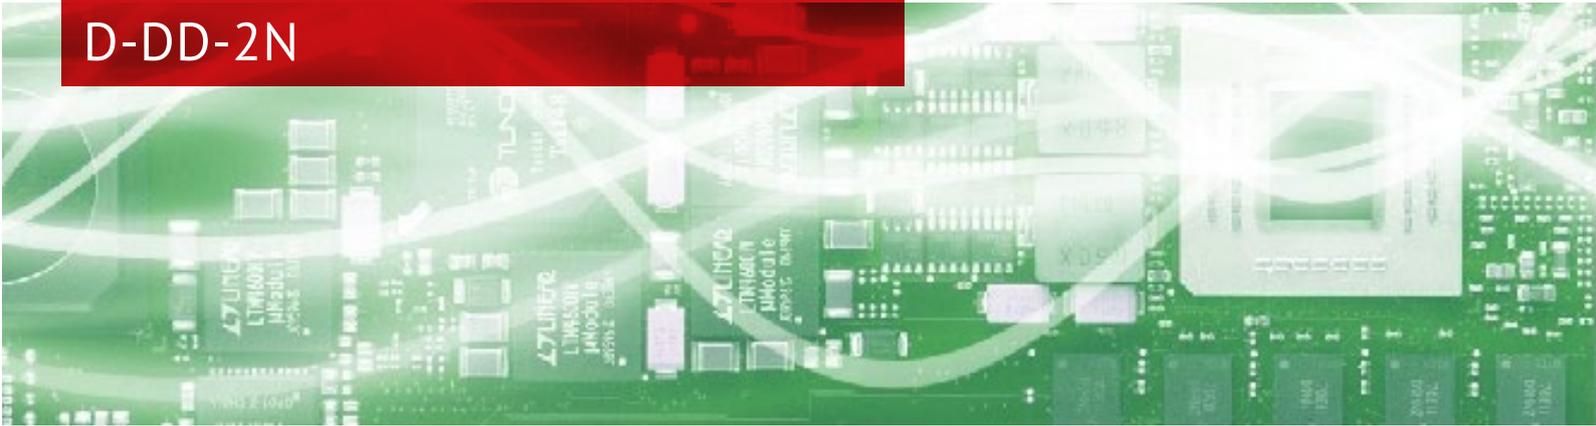

Ultrafast FPGA-based Digital Signal Processing

Optomet Vibrometers feature an end-to-end FPGA-based digital signal processing allowing a fully digital read-out of the measurement data. Digital signal processing avoids any drawbacks of analog demodulation which may result from component aging, temperature dependencies, noise and non-linearities. Significantly higher sensitivity, better resolution, and stability are the benefits of OptoMET's end-to-end digital signal processing. Extremely low noise levels produce precise results even from poorly reflecting measurement objects.

HIGHLIGHTS:

- Digital decoder
- 19 displacement measuring ranges
- Frequency range: DC bis 1 MHz
- Max. velocity up to 5 m/s
- Resolution down to 50 femtometers



High-Precision Sense Displacement Decoder

All vibrometers series feature by default a velocity decoder and can be supplemented with a suitable displacement and/or acceleration decoder.

The D-DD-2N displacement decoder provides an excellent sensitivity, even under challenging measuring conditions. It can measure displacements up to a velocity of 5 m/s and a vibration frequency of 1 MHz.
Required velocity decoder: D-VD-2N

Technical data

Pos.	Full Scale Output peak to peak	Signal Frequency Range	Max. Velocity
	μm	kHz	m/s
1	0.245	0 ... 1000	5
2	0.49	0 ... 1000	5
3	0.98	0 ... 1000	5
4	2.45	0 ... 1000	5
5	4.9	0 ... 1000	5
6	9.8	0 ... 1000	5
7	24.5	0 ... 1000	5
8	49	0 ... 1000	5
9	98	0 ... 1000	5
10	245	0 ... 1000	5
11	490	0 ... 1000	5
12	980	0 ... 1000	5
13	2,450	0 ... 1000	5
14	4,900	0 ... 1000	5
15	9,800	0 ... 1000	5
16	24,500	0 ... 1000	5
17	49,000	0 ... 1000	5
18	98,000	0 ... 1000	5
19	245,000	0 ... 1000	5

Range diagram

