



Digital Displacement Decoder D-DD-5N-30

Ultrafast FPGA-based Digital Signal Processing

Optomet Vibrometers feature an end-to-end FPGA-based digital signal processing allowing a fully digital read-out of the measurement data. Digital signal processing avoids any drawbacks of analog demodulation which may result from component aging, temperature dependencies, noise and non-linearities. Significantly higher sensitivity, better resolution, and stability are the benefits of Optomet's end-to-end digital signal processing. Extremely low noise levels produce precise results even from poorly reflecting measurement objects.

HIGHLIGHTS:

- Digital decoder
- 19 displacement measuring ranges
- Frequency range: DC bis 25 MHz
- Max. velocity up to 30 m/s
- Resolution down to 50 femtometers



High-End Master Displacement Decoder 30 m/s

All vibrometers series feature by default a velocity decoder and can be supplemented with a suitable displacement and/or acceleration decoder.

The D-DD-5N-30 expands the frequency bandwidth up to 25 MHz, is especially used for ultrasonic applications.

Required velocity decoder: D-VD-5N-30


Technical data

Pos.	Full Scale Output	Signal Frequency Range	Max. Velocity*
	peak to peak µm	kHz	m/s
1	0.245	0 ... 25000	30
2	0.49	0 ... 25000	30
3	0.98	0 ... 25000	30
4	2.45	0 ... 25000	30
5	4.9	0 ... 25000	30
6	9.8	0 ... 25000	30
7	24.5	0 ... 25000	30
8	49	0 ... 25000	30
9	98	0 ... 25000	30
10	245	0 ... 25000	30
11	490	0 ... 25000	30
12	980	0 ... 25000	30
13	2,450	0 ... 25000	30
14	4,900	0 ... 25000	30
15	9,800	0 ... 25000	30
16	24,500	0 ... 25000	30
17	49,000	0 ... 25000	30
18	98,000	0 ... 25000	30
19	245,000	0 ... 25000	30

* Velocity limited to 1 m/s at frequencies above 10 MHz

* Frequency limited to 100 kHz at velocity 30 m/s

Range diagram

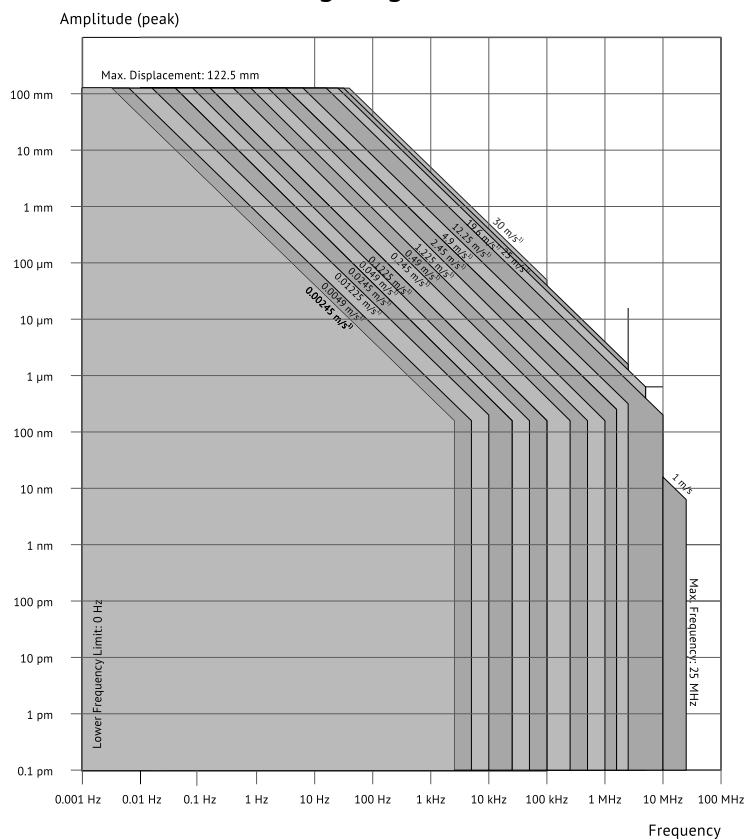

¹⁾Velocity limit is determined by the selected measurement range of the velocity decoder.

